


ANTI STATIC VINYL MAT

Antistatic flooring is an effective safeguard against loss of data, malfunctioning of the sensitive electronic equipment or computers. This flooring is highly recommended for controlling the generation, accumulation and dissipation of static charges.




Sea Green



Grey



Green




Ocean Blue

Application Areas:- Explosive manufacturer industries and its handling area, ordnance factories, depots, table tops, electronic/ telecom equipment manufacturing units, data centers, control room, research labs, CAT scan, MRI Centers etc.

DIMENSIONS AVAILABLE

Thickness	1.5 mm (2 layer)	2 mm (3 layer)
Roll width	2.0 mtr	
Roll Length	15 mtr	

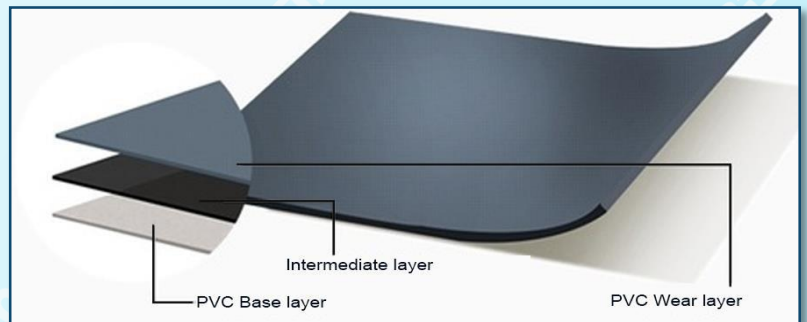

PERFORMANCE CHARACTERISTICS

Resistance- Antistatic Flooring	5×10^4 to 5×10^8 Ohms
Conductive -Flooring range	5×10^4 Ohms
Flexibility	Does not break and crack
Heat ageing exudation	No visible effect or exudation
Fire resistance	Doesn't support combustion or assist spread of flame
Water absorption	Less than 0.1%
Sound reduction factor	2.00mm- 3db
Elastic products	2 MJ/M ³ (MIN)